

TRI-VALSTOP

Rückschlagventil mit vollem Durchgang und FPM-Dichtung

Check valve, full bore and Viton seal



Technische Daten

Nennweite: 1/4", 3/8", 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3", 4"
 Betriebsdruck: Min. 0,05 bar - max. 40 bar (siehe Diagramm)
 Oeffnungsdruck: Min. 0,02 bar
 Temperaturbereich: -20°C bis +130°C
 Körper: Messing MS 58
 Ventilkegel: POM (Hostaform)
 Ventilkegelführung: POM (Hostaform)
 Dichtung: FPM
 Feder: V2A Stahl / AISI 304 / DIN 1.4301
 Einbauart: Beliebig

Einsatzbereiche:
 Pneumatik, Hydraulik, Klimaanlage, Heizungsinstallationen
 Wasser, Pressluft, Oel, Azetylen, Glycerin

Normen:
 ISO 228/1

Auf Anfrage:

- Sämtliche Typen auch in chemisch vernickelter Ausführung erhältlich
- Hochtemperatur Ausführung

Technical data

Diameter: 1/4", 3/8", 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3", 4"
 Working pressure: Min. 0,05 bar to max.40 bar (see diagram)
 Opening pressure: Min 0,02 bar
 Working temperature: -20° to +130°C
 Body: Brass MS 58
 Cone: POM (Hostaform)
 Cone guidance: POM (Hostaform)
 Seal: FPM
 Spring: Stainless steel / AISI 304 / DIN.1.4301
 Mounting position: Any



Applications:
 Pneumatic, hydraulics, air conditioning systems, heating installations, water, compressed air, oil, acetylene, glycerin

Norms:
 ISO 228/1

On request:

- All types also in nickel plated execution available
- Execution for high temperature

TRI - VALSTOP					
Gewinde / Thread	No. Tri - Matic	DN	A	B	Gewicht / Weight g
1/4"	6503179	10	28	46.5	95
3/8"	6503180	10	28	46.5	85
1/2"	6503181	15	34	52.5	145
3/4"	6503182	20	41.5	59	220
1"	6503183	25	50	67	345
1 1/4"	6503184	32	60.5	76	550
1 1/2"	6503185	40	73.5	90	930
2"	6503186	50	89	101	1430
2 1/2"	6503187	65	114	127	2650
3"	6503188	80	137	150	4500
4"	6503189	80	142	133.5	4250

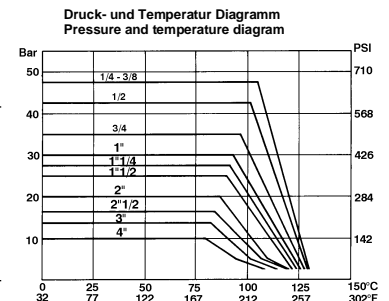

Bitte fragen Sie unsere aktuellen Preise an!

Do not hesitate to contact us for current prices!

TRI-MATIC AG - CH-6331 Hünenberg
 TRI-MATIC SA - CH-1400 Yverdon-les-Bains

Tel 041 780 22 22 info@tri-matic.ch
 Tel 024 426 12 13 filiale@tri-matic.ch